



DESCRIPTIVE FEATURES

INSULATION THICKNESS 50 mm

AISI 304 STAINLESS STEEL

ROUNDED EDGES

EVAPORATOR WITH CATAPHORESIS TREATMENT

DISTANCE BETWEEN RACK RAILS 65 mm

ACCESSORIES



Special voltages on request

ROOM CONDITIONS

+32°C

60% UR

SPECIFICATIONS IN COMPLIANCE WITH prEN 17032

Blast Chilling (+65°C / +10°C)		Deep Freezing (+65°C / -18°C)	
Max. Capacity	Time	Max. Capacity	Time
12 kg	120 min	7 kg	260 min

CONSUMPTION (prEN 17032)

Blast Chilling	Deep Freezing
+90°C / +3°C	+90°C / -18°C
0,16 kWh/kg	0,66 kWh/kg

REFRIGERANT GAS

Type	GWP	Charge
R290	0,02	80 g

TECHNICAL DATA

 Model	MX5.12ST	 Standard tension	230 V / 1 Ph 50 Hz	 Refrigeration power -30°C	470 W Evap. -30°C Cond. +45°C
 Version	AIR	 Power consumption	0,9 kW / 5,0 A	 Dimensions	655 x 715 x 755/785 mm
 Capacity	5 GN 1/1 5 GN 2/3	 HP	0,75 HP	 Net Weight	65 kg
 Blast Chilling	12 kg +90°C → +3°C 90 min	 Noise	<70 dB	 Set-up	GN 1/1 GN 2/3
 Deep Freezing	7 kg +90°C → -18°C 240 min	 Refrigeration power -10°C	1.160 W Evap. -10°C Cond. +45°C		

SET-UP

ACTIVA GN 1/1 - GN 2/3




Blast chilling positive (+3°C)

Freezing (-18°C)

Positive holding (+3°C)

Negative holding (-18°C)

DIMENSIONS

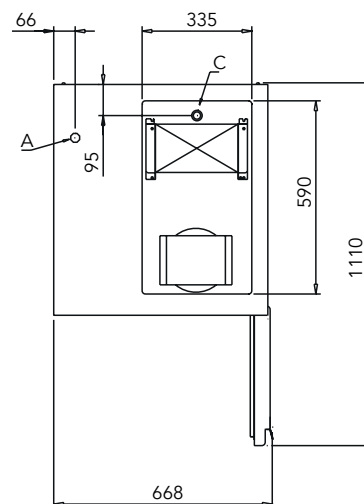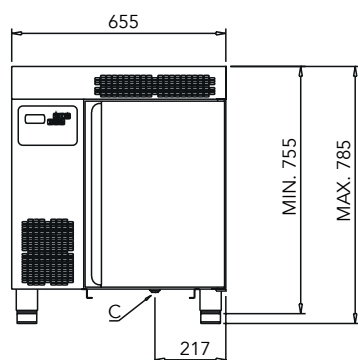

CONNECTIONS

A Electrical connection

C Drain